

## FA 202 Series Force Measuring Sensor with Dead Shaft Adapter

### Ultra Slim Design

Adaptable in machines with difficult space conditions

### 30:1 Force Measuring Range

Accurate measurements at both high and low loads

### Accuracy Class 0.3%


Highly linear measuring characteristic

### Nominal Forces 50, 125, 250 and 500 N

Ideal for the low and medium application range

### Stainless Steel Sensor, Aluminium Cover

Corrosion resistant, extremely durable

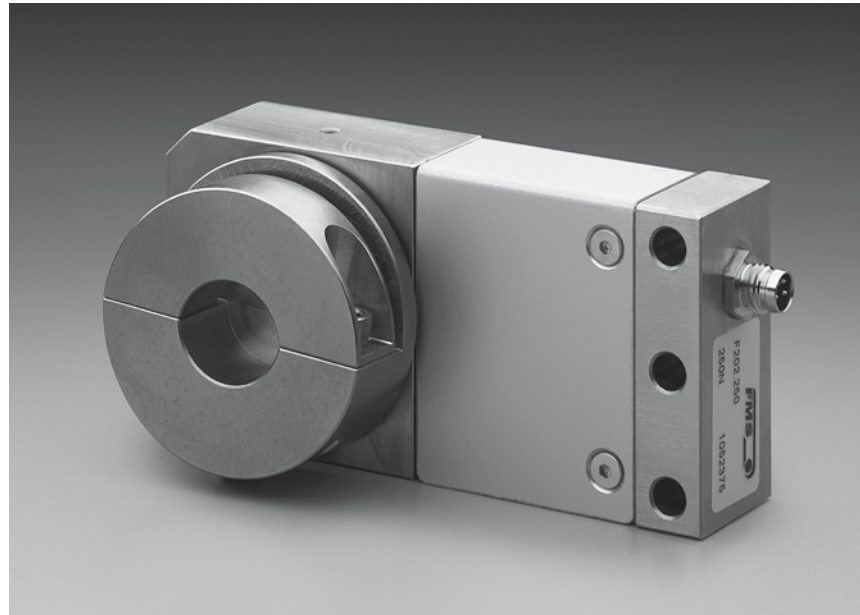


### ● FA 202 Series

The FA 202 Series Force Measuring Sensor is for use in dead shaft roller applications where limited space is available. The slim sensor design provides a new option for accurate web tension measurement on machines where wider sensor designs simply will not fit. The high-performance FA 202 Force Measuring Sensor ensures that even with low material wrap angles and high roller weights the tension will still be measured accurately. Sensor durability and operational reliability is excellent. The range of adapters covers the most popular shaft diameters. The red point located on the body of the sensor indicates the positive force measuring direction.

### ● Functional Description

The sensor utilizes foil type strain gauges mounted in a full Wheatstone Bridge configuration to provide extremely accurate tension measurement. The dual flexion beam design and built-in mechanical hard-stop eliminates angular deflection while reducing the possibility of recalibration or damage due to an overload condition. The connector on the sensor provides for fast wiring and easy installation, while the self-aligning bearing within the dead shaft adapter accommodates limited roller misalignment. The FA 202 Force Measuring Sensor is compatible with the full line of FMS Tension Measuring Amplifiers and Tension Controllers.


**FA 202 Series • Dimensions in mm or [inch]**

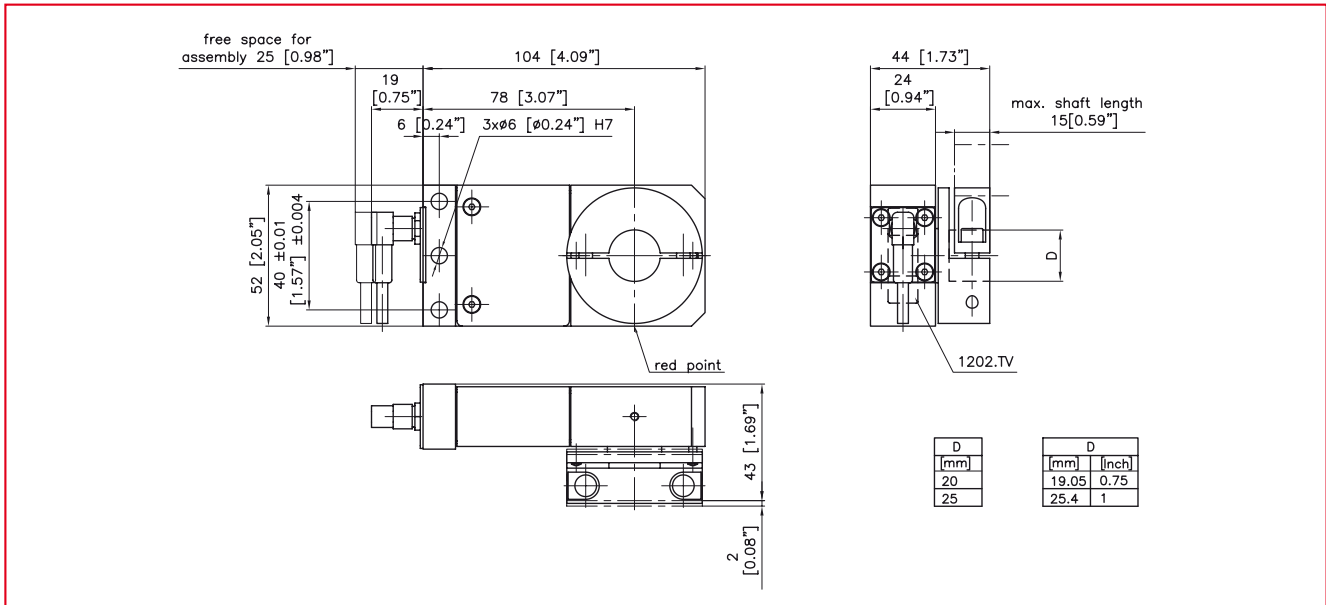

**FA 202 Series • Specifications**

Sensor Type	Nominal Force		Weight	
	N	lbf	kg	lbs
<b>F 202.50</b>	50	11.2	0.89	1.96
<b>F 202.125</b>	125	28.1	0.89	1.96
<b>F 202.250</b>	250	56.2	0.89	1.96
<b>F 202.500</b>	500	112.4	0.89	1.96

**Order Code (example):**

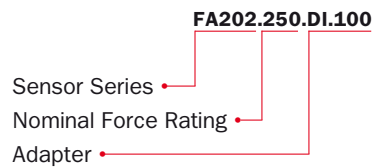

**FA 202 Series • Adapter Specifications**

Inch Adapter Type	D inch	Metric Adapter Type	D mm
<b>FA 202.DI.075</b>	0.75"	<b>FA 202.DM.20</b>	20
<b>FA 202.DI.100</b>	1.00"	<b>FA 202.DM.25</b>	25

**Scope of delivery:**

(1) Sensor, (1) Snap Ring, (1) Adapter, Spacer, Installation and Operation Manual.

**Not Included:**

Mounting Screws, Washers, Cable, or Connector.

**FA 202 Series • Technical Data**

Sensitivity	1.8 mV / V ±2%
Accuracy Class	±0.3% (F <sub>nominal</sub> )
Temperature Coefficient	±0.1% / 10 K
Temperature Range	- 10...+60°C [14...140°F]
Input Resistance	350 Ω
Supply Voltage	1...12 VDC
Maximum Overload	10 times rated nominal force
Sensor Material	Stainless steel (aluminium cover)

**Accessories FA 202      Ordering Code**

<b>Shoulder bolt</b> Ø 6 x 30 / M5	50001930
<b>Dowel pin d6 h6 x 20</b>	50000558
<b>Sensor cable with connector</b>	50002226 ( 2 m) 50002227 (10 m)

**World Headquarters:**

**FMS Force Measuring Systems AG**  
 Aspstrasse 6  
 8154 Oberglatt (Switzerland)  
 Phone + 41 44 852 80 80  
 Fax + 41 44 850 60 06  
 info@fms-technology.com

**FMS USA, Inc.**  
 2155 Stonington Avenue  
 Suite 119  
 Hoffman Estates, IL 60169  
 Phone + 1 847 519 4400  
 Fax + 1 847 519 4401  
 fmsusa@fms-technology.com

**FMS UK**  
 Highfield, Atch Lench Road  
 Church Lench  
 Evesham WR 11 4UG  
 Phone + 44 1386 871023  
 Fax + 44 1386 871021  
 fmsuk@fms-technology.com

**FMS Italy**  
 Via Baranzate 67  
 20026 Novate Milanese  
 Phone + 39 02 39487035  
 Fax + 39 02 39487035  
 fmsit@fms-technology.com